


VICON
 Vicon Industries Inc.
 Corporate Headquarters
 89 Arkay Drive
 Hauppauge, NY 11788
 631-952-CCTV (2288)
 Fax 631-951-CCTV
 Toll Free 1-800-645-9116
 Tech Support 1-800-34-VICON
 www.vicon-cctv.com

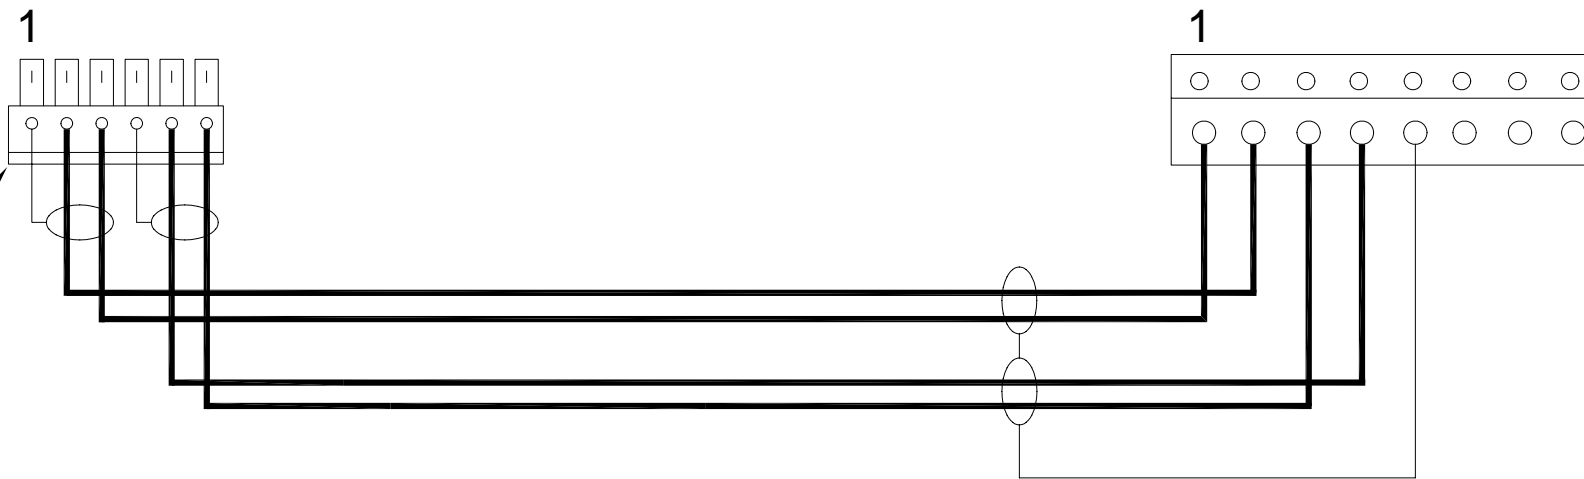


Connects to
 V1400X -IDL
 Any Output Connector
 J1 - J10

Connects to
 SVFT Camera
 Comm TB3


V1400X-IDL to SurveyorVFT Camera TB3			
V1400X-IDL (J1-J10)		SurveyorVFT TB3	
1	GROUND	5	GROUND*
2	COMMAND OUT-	2	COMMAND IN -
3	COMMAND OUT+	1	COMMAND IN+
4	GROUND	5	GROUND*
5	RESPONSE IN -	4	RESPONSE OUT -
6	RESPONSE IN +	3	RESPONSE OUT +
		6	N/C
		7	N/C
		8	N/C

*Connect either pin 1 or 4 on V1400X-IDL to ground pin 5 on SurveyorVFT TB3

V1400X-IDL,
 J1- J10
 (Output)

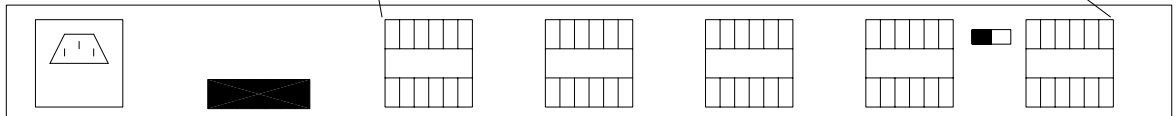

V1400X-IDL (Rear Panel)

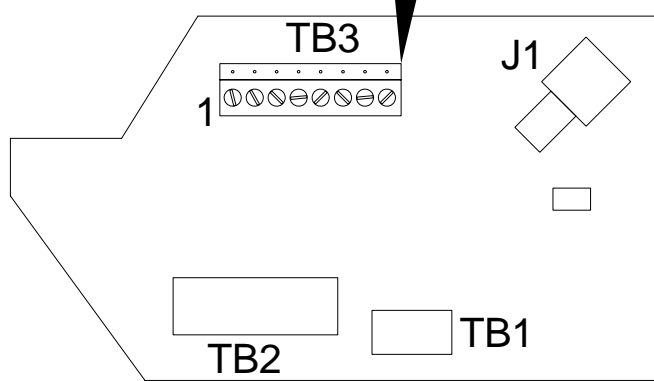

Surveyor VFT

- Notes:
1. Connectors are shown from wiring side.
 2. Insure wires are paired as shown in drawing.
 3. Wiring is Belden 8723 or its electrical equivalent.

REVISIONS	
SCALE:	NTS
DATED:	1/23/07
DRAWN:	JMH
CHECKED:	C: A:
PROJECT:	Interconnects - Typical
TITLE:	Connector Pinouts: V1400X-IDL, J1-J10 To SVFT Camera, TB3
NUMBER:	1400-4000-05
Rev.	-00

This drawing and the contents herein are Copyright 2002 Vicon Industries Incorporated. They are furnished on a confidential basis for the specified purpose as indicated on the drawing itself. Permission is granted to use and copy this drawing freely provided that (a) the intended usage is the connection and operation of Vicon equipment, and (b) any copies contain this notice in its' entirety. Vicon makes no representations as to the operability of any described systems or interconnections unless this drawing is specifically marked for Construction.